

The identification of open loop recording curve on heat exchanger to determine PID control parameters and eliminate overshoot occurrence

by Kiagus Ahmad Roni, Taufik Sri Martini, Elfidiah, Cekmas Cekdin

Submission date: 29-Jul-2022 09:34AM (UTC+0700)

Submission ID: 1876393014

File name: Open_Loop_Recording_Curve_On_Heat_Exchanger_To_Determine_PID.pdf (335.02K)

Word count: 2724

Character count: 13375

The identification of open loop recording curve on heat exchanger to determine PID control parameters and eliminate overshoot occurrence

Abstract --The changes in heat exchanger characteristics due to dirt sediment and the effect of corrosion on the conduction pipe can cause difficulty to control the system properly. To anticipate sudden changes in heat exchanger characteristics, this study then tried to identify the open loop recording curve on the heat exchanger in the form of a temperature curve and create a PID controller simulation program. The identification method used in this work was the C.L. Smith method. The simulation test results indicated that some changes in the process variables have occurred following the set point. In this case, the simulation often found some overshoot phenomena which would bring negative impact. In order to avoid the impact, the occurrence of overshoot must be reduced or eliminated.

Streszczenie. Zmiany w charakterystyce wymiennika ciepła spowodowane osadzeniem się brudu i wpływem korozji na rurę przewodzącą mogą powodować trudności w prawidłowym sterowaniu systemem. Aby przewidzieć nagle zmiany w charakterystyce wymiennika ciepła, w ramach tego badania podjęto próbę zidentyfikowania krzywej rejestracji w pętli otwartej na wymienniku ciepła w postaci krzywej temperatury i stworzenia programu symulacyjnego regulatora PID. Metodą identyfikacji wykorzystaną w tej pracy była metoda C.L. Metoda Smitha. Wyniki testów symulacyjnych wykazały, że pewne zmiany w zmiennych procesowych wystąpiły po wartości zadanej. W tym przypadku symulacja często wykazywała pewne przeregulowania, które miałyby negatywny wpływ. Aby uniknąć uderzenia, należy ograniczyć lub wyeliminować występowanie przeregulowania. (Identyfikacja krzywej rejestracji w otwartej pętli na wymienniku ciepła w celu określenia parametrów regulacji PID i wyeliminowania występowania przeregulowania)

Keywords: heat exchanger, temperature, PID controller, overshoot.
Słowa kluczowe: wymiennik ciepła, regulator PID, przeregulowanie

Introduction

Heat Exchanger is part of secondary process units in chemical manufacturing process. It can determine the quality of final product in the industry. Exchange the heat between two types of fluids having different temperatures is expected in this unit in order to provide a constant fluid temperature from the output. The type of controller that is widely used in industrial manufacturing process is the PID controller (Proportional, Integral, and Differential). This conventional controller has been considered stable and easy to operate. Generally, PID controller has three control methods, namely Proportional (P), integral (I), differential (D). In its operation, the three control parameters require good tuning in order to provide reliable and fast output responses.

To date, several methods have been introduced to tune the PID controller parameters including by conducting trial and error method manually. As the changes in process characteristics must be followed by re-tuning of the control parameters, performing controller tuning can be time-consuming and causing disruption in the running process. For this reason, we need a technique that is able to adapt to changes in process parameters and perform automatic re-tuning of controlling parameters. The trial and error method that is manually applied is risky because changes in process variables often occur suddenly leading to the need of constant supervision from the operator in the control room.

Therefore, this work tried to design and create software for making feasible simulation to identify the open loop curve in the form of a temperature curve on the heat exchanger [1, 2]. The open loop curve identified by the C.L. Smith method is used to determine the relationship between time t_1 and t_2 , so that the parameters will be obtained: time constant and delay time. Based on the results of the simulation design, the changes in process variables is similar or close to the set-point or target in accordance with the dynamic field.

After obtaining the values of the time constant parameter and the time delay, software then can be made for the simulation to determine the value of proportional strengthening K_p , time integral T_i , and time derivative T_d based on the Ziegler-Nichols method [3, 4]. Finally, the simulation design for the eliminating closed-loop curve overshoot can be achieved.

Research method

Figure 1 shows a heat exchanger configuration where the transfer function can be the ratio between the steam input pressure to the valve opening $P_s(t)/X(t)$, or the ratio between the output fluid temperature and the steam input $T_f(t)/P_s(t)$, or the ratio between the output fluid temperature and steam input pressure $T_f(t)/T_s(t)$ [5].

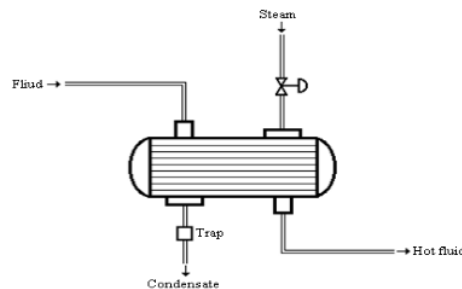


Fig 1. Heat exchanger configuration.

Analysing the transfer function of a process was done using the C.L. Smith process that is expressed in the following transfer formula [6][7]

$$(1) \quad G_p(S) = \frac{K_s \cdot e^{-tds}}{\tau s + 1}$$

where G_p is a transfer function of order -1 with time delay, K_s is the static gain of the process, t_d is the deal time of the process, and τ is the time constant of the process. In this analysis method, PV has an amplitude of 28.3% of the steady state point. When it is projected onto the time axis, t_1 can be obtained. Furthermore, the PV reaches an amplitude of 63.2% when it is projected onto the time axis, so t_2 will be obtained as shown in Figure 2.

C.L Smith's method determine the relationship between time t_1 , t_2 with time constant and time delay t_d that can be stated as follows [6]

$$(2) \quad t_1 = (t_d + \frac{1}{3} \tau)$$

$$(3) \quad t_2 = (t_d + \tau)$$

While the static strengthening of the process can be determined by following equation:

$$(4) \quad K_s = \frac{\Delta PV}{\Delta MP}$$

where ΔPV is the deviation of the amplitude of the process output signal (process variable), ΔMP is the deviation of the amplitude of the control signal (manipulated variable), and Δc_s is the change in the reference of price.

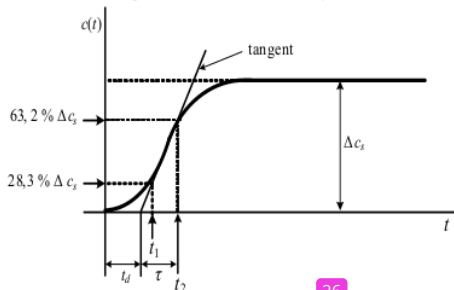


Fig 2. Analysis of the transition response curve of the process

The transfer function of the PID controller then is expressed as follows [8]

$$(5) \quad G_c(s) = K_p \left(1 + \frac{1}{T_i s} + T_d s \right)$$

where K_p is the proportional amplifier, T_i is the integral time, and T_d is the derivative time. If $e(t)$ is the input signal to the controller, the output $u(t)$ of this controller is given by following function:

$$(6) \quad u(t) = K_p \left[e(t) + \frac{1}{T_i} \int_0^t e(t) dt + T_d \frac{de(t)}{dt} \right]$$

To determine the value of proportional gain K_p , integral time T_i , and time derivative T_d the Ziegler-Nichols method is used. PID control tuning can be done by finding a mathematical model of the process that fully represents the dynamics of the process through experiments. The effort made in finding a mathematical model and determining the optimal process parameters experimentally in the problem is named identification process. Eventually, to analyze the performance of a complex process, a mathematical model approach is utilized by assuming the process as the first-order system as seen in Equation (1).

The value of the proportional strengthening of K_p , the integral time of T_i , and the derivative time of T_d are based on the Ziegler-Nichols method as shown in Table 1 [9][10].

Table 1. Ziegler-Nichols tuning based on on the response of the unit step of the system.

Controller Type	K_p	T_i	T_d
P	$\frac{1}{K_s} \left(\frac{t_0}{\tau} \right)^{-1}$	∞	0
PI	$\frac{0,9}{K_s} \left(\frac{t_0}{\tau} \right)^{-1}$	3,33 t_0	0
PID	$\frac{1,2}{K_s} \left(\frac{t_0}{\tau} \right)^{-1}$	$2t_0$	$\frac{1}{2}t_0$

The response curve of a first-order system with a time delay that has an overshoot can be eliminated by setting the PI controller as expresses in the following equations [11][12]

$$(7) \quad G(s)H(s) = K_p \left(1 + \frac{1}{T_i s} \right) \left(\frac{K_s}{\tau s + 1} e^{-t_d s} \right)$$

Where $s = j\omega$,

$$(8) \quad G(j\omega)H(j\omega) = K_p \left(\frac{j\omega T_i + 1}{j\omega T_i} \right) \left(\frac{K_s}{j\omega \tau + 1} \right) e^{-j\omega t_d}$$

Selected $T_i = \tau$, so that from Equation (8) we can get below formula

$$(9) \quad G(j\omega)H(j\omega) = \frac{K_p \cdot K_s}{j\omega \tau} e^{-j\omega t_d}$$

The magnitude of Equation (9) is

$$(10) \quad |GH| = \frac{K_p \cdot K_s}{\omega \cdot \tau}$$

for $\omega = \omega_c$, then Equation (10) becomes

$$(11) \quad |GH| = \frac{K_p \cdot K_s}{\omega_c \cdot \tau} \leq 0,5$$

The angle of Equation (11) is

$$(12) \quad \angle GH = -\frac{\pi}{2} - \omega_c \cdot t_d$$

For $\omega = \omega_c$, then Equation (12) becomes:

$$(13) \quad \angle GH = -\frac{\pi}{2} - \omega_c \cdot t_d$$

Equation (13) then becomes:

$$(14) \quad -\frac{\pi}{2} - \omega_c \cdot t_d = -\pi$$

Or

$$(15) \quad \omega_c = \frac{\pi}{2 \cdot t_d}$$

So,

$$(16) \quad K_p \leq 0,5 \cdot \omega_c \cdot \tau$$

$$(17) \quad K_p \leq 0,5 \cdot \frac{\pi}{2} \cdot \frac{\tau}{t_d} \cdot \frac{1}{K_s}$$

$$(18) \quad K_p \leq 0,8 \cdot \frac{\tau}{t_d} \cdot \frac{1}{K_s}$$

For PI control

$$(19) \quad K_p \leq \frac{0,5}{K}$$

Or (20)

$$K_p < 0,8 \cdot \frac{\tau}{t_d} \cdot \frac{1}{K_s}$$

Magnitude of $|G(j\omega)H(j\omega)|$

$$(21) \quad |G(j\omega)H(j\omega)| = \frac{K_p \cdot K_s \cdot \sqrt{(\omega T_i)^2 + 1}}{\omega T_i \sqrt{(\omega \tau)^2 + 1}}$$

The characteristic equation can then be stated as follows:

$$(22) \quad 1 + G(s)H(s) = 0$$

$$(23) \quad 1 + K_p \left(1 + \frac{1}{T_i s} \right) \left(\frac{K}{\tau s + 1} \right) = 0$$

$$(24) \quad (T_i s)(\tau s + 1) + K_p \cdot K_s (T_i s + 1) = 0$$

$$(25) \quad T_i \tau s^2 + T_i s(1 + K_p \cdot K_s) + K_p \cdot K_s = 0$$

with $GB = K_p \cdot K_s$ and so that the system does not give oscillations, then from Equation (25) we get

$$(26) \quad T_i^2 (1 + K_p \cdot K_s)^2 - 4 T_i \cdot \tau \cdot K_p \cdot K_s \geq 0$$

$$(27) \quad T_i \geq \frac{4 \tau GB}{(1 + GB)^2}$$

Figure 3 shows the relationship between GB and T_i at the boundary of the oscillating and non-oscillating system.

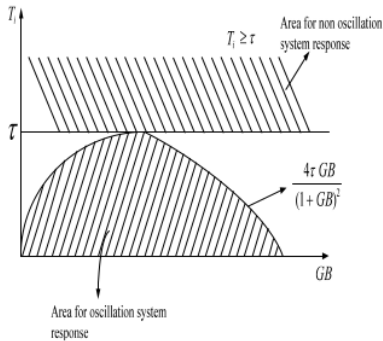


Fig 3. Relationship of GB to T_i system boundary oscillating and non-oscillating.

Heat Exchanger Open Loop Recording Curve

The open loop heat exchanger recording curve is shown in Figure 4.

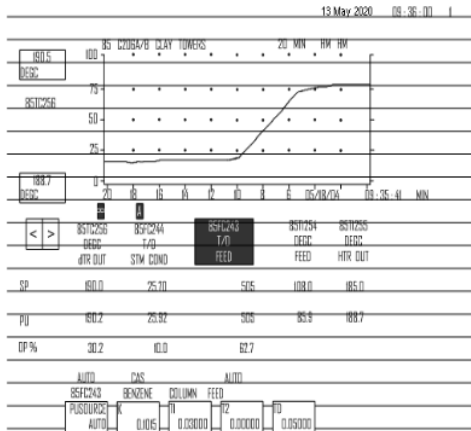


Fig 4. Curve of the open loop heat exchanger recording.

Results and analysis Identification

Based in figure 4 that illustrates the open loop heat exchanger recording curve, further identification can be redrawn as seen in figure 5.

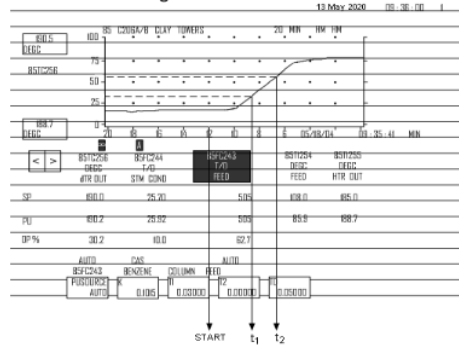


Fig 5. Identification of the open loop recording curve heat exchanger from Figure 4.

Identification Results

From Figure 5, the process parameter data for the controller can be obtained as follows:

$$\Delta PV = 1,8^{\circ}\text{C}; \Delta MV = 1,3428^{\circ}\text{C}; K_s = \frac{\Delta PV}{\Delta MV} = 1,34; t_1 = 2,9 \text{ minutes}; t_2 = 5,7 \text{ minutes}; \tau = \frac{3}{2}(t_2 - t_1) = 4,2 \text{ minutes}; t_0 = t_2 - \tau = 1,5 \text{ minutes}$$

From the data above, the process transfer function can be expressed as follows:

$$G_p(s) = \frac{1,34 e^{-1,5s}}{4,2s + 1}$$

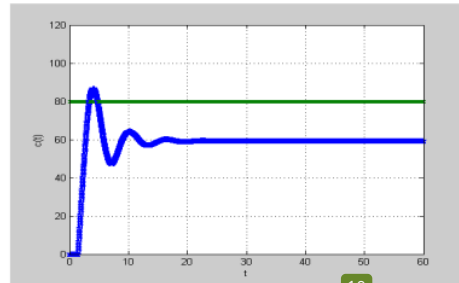


Fig 6. The results of the simulation program on a closed loop heat exchanger with P controller type.

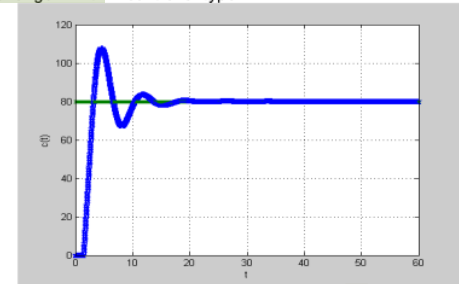


Fig 7. The results of the simulation program on a closed loop heat exchanger with PI controller type.

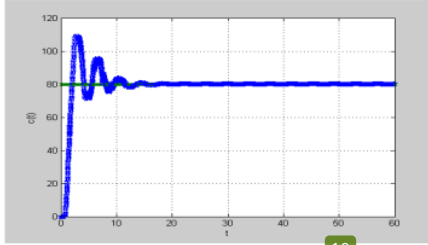


Fig 8. Results of the simulation program on a closed loop heat exchanger with PID controller type.

Simulation

Simulation program was conducting using MATLAB programming language. The product in the heat exchanger has a complete reaction at the desired temperature of 80°C for 60 min, the control results with P, PI, and PID types then are obtained as shown in figures 6, 7, and 8.

Overshoot Elimination

There is a fairly large overshoot in figures 6 to 8 above. This overshoot can be eliminated by determining the value of K_p , T_i , and for $T_d = 0$. The value of K_p , T_i , can be found using Equations (19) to (2-27). According to Equations (19) to (27), it is necessary to evaluate the value of the static amplifier or K , and τ , from the data for the price of $K = 1.34$ and $\tau = 4.2$ min. So the value of K_p can be obtained as follows:

$$K_p \leq \frac{0,5}{K}$$

$$K_p \leq \frac{0,5}{1,34}$$

$$K_p \leq 0,373$$

For this K_p , price $K_p = 0.3$ is taken. For the price of T_i , it can be further examined as follows:

$$T_i \geq \frac{4\tau \cdot K_p \cdot K}{(1 + K_p \cdot K)^2}$$

By entering the prices above,

$$T_i \geq \frac{4 \cdot 4,2 \cdot 0,3 \cdot 1,34}{(1 + 0,3 \cdot 1,34)^2}$$

$$T_i \geq 3,436$$

Or $3,436 \leq T_i$

T_i price can be taken $T_i = 3.5$ minutes.

28 In the simulation, the value of $K_p = 0.3$, $T_i = 3.5$ min, and $T_d = 0$, the results then are as shown in Figure 9

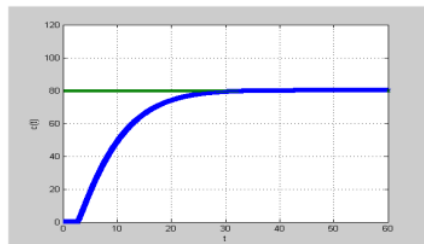


Fig 9. Response curve without overshoot.

The combination of figures 7 and 9 then produced the particular pattern as depicted in figure 10.

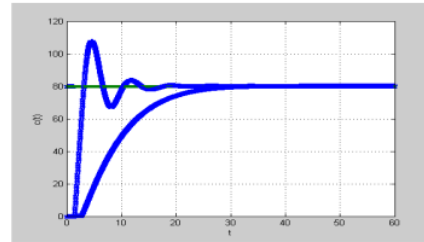


Fig 10. Combined Figures 7 and 9.

Analysis

Based on the closed-loop response curve displayed in figure 6, the variable process for the long time cannot reach the target temperature (set point) of 80°C. It can be seen that, for the long time, the variable process temperature is ± 600 °C. For the closed loop response curve in Figure 7, the variable process for the long lead time is close to or equal to the target temperature (set point) of 80°C. However, there was an overshoot (initial spike) at $t_p = 4.60$ min. The amount of overshoot can be calculated as follows

$$M_p = \left(\frac{107,52 - 80}{80} \right) \times 100 \% = 34,4 \approx 34 \%$$

For the closed loop response curve (figure 8), the variable process for the long lead time is close to or equal to the target temperature (set point) of 80°C. However, for the long time leading to the variable process, it can be seen that overdamped oscillations occur. There is also a large overshoot at $t_p = 3.02$ min. The amount of overshoot that occurs is stated as follows

$$M_p = \left(\frac{137,75 - 80}{80} \right) \times 100 \% = 72,19 \approx 72 \%$$

Conclusion **4**

The results of the closed-loop response curve in the variable process for the long time cannot reach the target temperature (set point) of 80°C. It just achieved variable process temperature of ± 60 °C instead. Moreover, there was an overshoot (initial spike) at $t_p = 4.60$ min. The amount of overshoot was around 34%. Furthermore, the variable process for the long lead time was close to or equal to the target temperature (set point) by 80°C. However, for the long time leading to the variable process, it can be seen that (overdamped) oscillations occurred along with a large overshoot at $t_p = 3.02$ min. In this case, the occurrence of overshoot was 72%. Regarding the results of the closed loop response curve, it can be assumed that it is relatively good with the PI controller type. It can also be implemented by process control engineers to eliminate overshoot only closed loop response curve with PI controller type for reducing overshoot chances and (overdamped) oscillation rate.

12 Author : Dr. Kiagus ahmad Roni, Chemical Engineering Department, Muhammadiyah Palembang University, Indonesia email: kiagusahmadroni@gmail.com; Taufik, student Master Electrical Engineering Department, Muhammadiyah Palembang University, Indonesia; Dr. Sri Martini, Chemical Engineering Department, Muhammadiyah Palembang University; Dr. Elfidia, Chemical Engineering Department, Muhammadiyah Palembang University, Dr. Cekmas Cekdin, Electrical Engineering Department, Muhammadiyah Palembang University, Indonesia, cekmasump@gmail.com

- REFERENCES**
- [1] K. Van Heusden, J.M. Ansemino, G.A. Dumont, (2018), Performance of robust PID and Q-design controllers for propofol anesthesia, IFAC Papers On Line 51-4, pp.78–83
- [2] Jan Mikles, Miroslav Fikar, (2007), Process, Modelling, Identification, and Control, Springer.
- [3] Katsuhiko Ogata, (1997), Modern Control Engineering, 3rd Edition, Prentice-Hall International, Inc.
- [4] Richard C. Dorf, (1995), Modern Control Systems, 7th Edition, Addison-Wesley,
- [5] M.Indumathy, S. Sobana, Rames C, Panda, (2021), Modelling of fouling in a plate heat exchanger with high temperature pasteurisation process, Applied Thermal Engineering, Vol. 189.
- [6] Carlos A. Smith, Armando Corripio, (1997), Principles and Practice of Automatic Process Control, 2nd Edition, Wiley.
- [7] W.L. Luyben,(1990), Process Modeling Simulation, and Control for Chemical Engineers, 2nd Edition, McGraw-Hill International Editions.
- [8] Norman S. Nise, (1995), Control Systems Engineering, 1st Edition, Addison-Wesley.
- [9] Charles L. Phillips, Royce D. Harbor, (1996), Feedback Control Systems, 3rd Edition, Prentice-Hall International, Inc.
- [10] Sergey Edward Lyshevski, (2004), Control Systems Theory with Engineering Applications, Jaico Publishing House.
- [11] G. Lindfield, J. Penny, (1995), Numerical Methods Using MATLAB, Ellis Horwood.
- [12] Ahmad Ali, Somanath Majhi, (2009), PI/PID controller design based on IMC and percentage overshoot specification to controller setpoint change, ISA Transactions, Vol. 18, Issue 1, pp.10-15.

The identification of open loop recording curve on heat exchanger to determine PID control parameters and eliminate overshoot occurrence

ORIGINALITY REPORT

19%

SIMILARITY INDEX

15%

INTERNET SOURCES

14%

PUBLICATIONS

8%

STUDENT PAPERS

PRIMARY SOURCES

1	www.slideshare.net Internet Source	2%
2	id.scribd.com Internet Source	1%
3	Submitted to University of Mosul Student Paper	1%
4	ddd.uab.cat Internet Source	1%
5	Leijun Xiang, Yinyin Dai, Xiaofen Lu. "Novel IMC-PID controller design and parameter tuning with improving control performance for the SOPTD processes", 2013 10th IEEE International Conference on Control and Automation (ICCA), 2013 Publication	1%
6	riull.ull.es Internet Source	1%

7	M. Muneeshwaran, Li-Hsiang Wen, Chi-Chuan Wang. "Investigation of fouling mitigation using stationary and rotating twisted tapes", Applied Thermal Engineering, 2022 Publication	1 %
8	"PID Control in the Third Millennium", Springer Nature, 2012 Publication	1 %
9	Submitted to Napier University Student Paper	1 %
10	Sanjid Islam, S. M. Masum Ahmed, Mohammad Zeyad, Md. Sadik Tasrif Anubhove et al. " Potential Reduction in CO Emission by Heat Pump System in Bangladesh ", 2021 International Conference on Computational Performance Evaluation (ComPE), 2021 Publication	1 %
11	Submitted to University of Warwick Student Paper	1 %
12	Eka Sri Yusmartini, Ridwan, Dedi Setiabudidaya, M. Faizal, Marsi. "Synthesis and characterizations of nZVI-AC composites from coconut shells and its application for the adsorption of Pb(II) and Cr(VI) ions", IOP Conference Series: Materials Science and Engineering, 2019 Publication	1 %

13	Submitted to Engineering Institute of Technology Student Paper	1 %
14	epdf.pub Internet Source	1 %
15	eprints.upnyk.ac.id Internet Source	1 %
16	repository.untar.ac.id Internet Source	1 %
17	repository.um-palembang.ac.id Internet Source	1 %
18	www.red.pe.org.pl Internet Source	<1 %
19	www.skedsoft.com Internet Source	<1 %
20	www.mnit.ac.in Internet Source	<1 %
21	Sri Martini, Sharmeen Afroze, Mira Setiawati. "Performance Analysis of Various Advanced Oxidation Processes on COD Removal from Raw Petroleum Refinery Effluent", Journal of Korean Society of Environmental Engineers, 2021 Publication	<1 %
22	docplayer.com.br	

Internet Source

<1 %

23

www.ijser.org

Internet Source

<1 %

24

www.researchgate.net

Internet Source

<1 %

25

www.springerlink.com

Internet Source

<1 %

26

authors.library.caltech.edu

Internet Source

<1 %

27

nozdr.ru

Internet Source

<1 %

28

Ján Mikleš. "The Control Problem and Design of Simple Controllers", Process Modelling Identification and Control, 2007

Publication

<1 %

29

Slati Wahyuningtri, Dieky Adzkiya, Hendro Nurhadi. "Motion Control Design and Analysis of UR5 Collaborative Robots Using Proportional Integral Derivative (PID) Method", 2021 International Conference on Advanced Mechatronics, Intelligent Manufacture and Industrial Automation (ICAMIMIA), 2021

Publication

<1 %

dokumen.pub

30

Internet Source

<1 %

31

repositorio.ufrn.br:8080

Internet Source

<1 %

32

"Process Modelling, Identification, and Control", Springer Science and Business Media LLC, 2007

Publication

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography Off