

# The Influence of Starch Weight Variations in Making Bioethanol from Plantain Turber Waste (*Musa Sapientum*)

*by* Kiagus Ahmad Roni

---

**Submission date:** 26-Apr-2021 08:28AM (UTC+0700)

**Submission ID:** 1569628791

**File name:** 1230-Article\_Text-2636-1-10-20210410.pdf (399.9K)

**Word count:** 2661

**Character count:** 13875

## The Influence of Starch Weight Variations in Making Bioethanol from Plantain Turber Waste (Musa Sapientum)

Kiagus Ahmad Roni<sup>1</sup>

13

<sup>1</sup>Chemical Engineering, Faculty of Engineering, Muhammadiyah University, Palembang, Indonesia  
Email: <sup>1</sup>kiagusaroni@gmail.com

### Abstract

Bioethanol (C<sub>2</sub>H<sub>5</sub>OH) is a biochemical substains (biofuel) from the sugar fermentation process using carbohydrate sources with the help of microorganisms. Bioethanol is used as an alternative fuel and source of biofuels that are environmentally friendly and renewable. One of the alternative raw materials is bioethanol from banana Turber raw materials. This study aims to determine the effect of variations in starch weight on the manufacture of bioethanol from plantain (Musa Sapientum) hump. The weight of starch varied in the hydrolysis process was 100 grams, 150 grams, 200 grams, 250 grams and 300 grams, where the sulfuric acid solution used was 0.5N. At the fermentation stage the hydrolysis solution used Saccaromyces Cerevisiae yeast for 4 days of fermentation. To determine the level of bioethanol purity obtained, analysis was carried out using gas chromatography, determination of the refractive index using a refractometer, and determination of the volume of bioethanol obtained. From this study, it was found that the optimum starch weight obtained was the use of 250 grams of banana Turber starch with bioethanol content of 8.4432%, the volume obtained was 18.8 mL, a pH of 7.46 and a Refractive Index of 1.33587. From the analysis data, the bioethanol obtained has a small quantity and quality compared to standard ethanol.

**Keywords:** bioethanol, banana Turber, alternative fuels, starch weight, fermentation

### 1. INTRODUCTION

Bioethanol can be produced from biomass containing starch or cellulose components, such as cassava, tubers, and sago starch [2]. In the industrial world, ethanol is generally used as a raw material for industrial alcohol derivatives, a mixture of liquor, as well as pharmaceutical and cosmetic raw materials [4]. Apart from that, it is a source of biofuel which has properties similar to premium oil [7].

Bioethanol has better characteristics compared to petrochemical-based gasoline [3], namely (a) Contains 35% oxygen, so it can increase combustion efficiency and reduce greenhouse gases (b) Has a higher octane value, so it can replace functions additives, such as methyl tertiary butyl ether and tetra ethyl lead (c) have an octane value of 96-113, while the octane value of gasoline is only 85-96 (d) Bioethanol is environmentally friendly, because the exhaust gas is low on compounds that have potential as pollutants , such as carbon monoxide, nitrogen oxides, and greenhouse gases (e) Bioethanol is easy to decompose and is safe

because it does not pollute water (f) As a renewable energy source and the production process is relatively simpler than the gasoline production process[8]

Banana plants consist of roots, Tubers, stems, leaves, flowers and fruit. The roots are in the form of root fibers that originate in the stem tubers (Turbers). Most of the roots are in the underground part which grows to a depth of 75 to 150 cm in the soil. The roots that are on the side of the tuber (Turber) grow sideways or horizontally [5]. The image of the plantain (Musa Sapientum) hump used can be seen in Figure 1.



**Figure 1.** Banana Raja Tubers (*Musa Sapientum*)

Starch contained in banana stem tubers can be used as a source of carbohydrates and can even be dried to become ash. Where the ash from these tubers contains soda which can be used as an ingredient in soap and fertilizer. Banana hump starch can also be used as raw material for bioethanol production, because it has a high enough sugar content [11]. Banana stems or humps can be used to extract starch, this starch is similar to tapioca starch [6]. The potential for large banana tubers starch content can be used as an alternative fuel, namely, bioethanol. Banana Tubers has the following composition.

**Table 1.** Chemical composition of banana Turber per 100 grams of material

Component	Wet	Dry
Calory (cal)	43	245
Protein (g)	0,6	3,4
Lemak (g)	-	-
Carbohidrat (g)	11,6	66,2
Ca (mg)	15	60
P (mg)	60	150
Fe (mg)	0,5	2
Vitamin A (SI)	-	-
Vitamin B (mg)	0,01	0,04
Vitamin C (mg)	12	4



## 2. METHODS

The processing of bioethanol from banana tubers waste is carried out by hydrolysis using sulfuric acid and fermentation with microorganisms (yeast). Both processes are carried out in stages, by hydrolyzing starch to glucose, then followed by a fermentation process so that it will produce bioethanol, as well as a distillation process so that bioethanol will be obtained with good purity levels. This research was conducted in a laboratory scale with two variables, namely fixed variables and independent variables with starch weight of 100 grams, 150 grams, 250 grams, and 300 grams. The following figure 2 explains the flowchart of the research process.

The Process of Making Starch

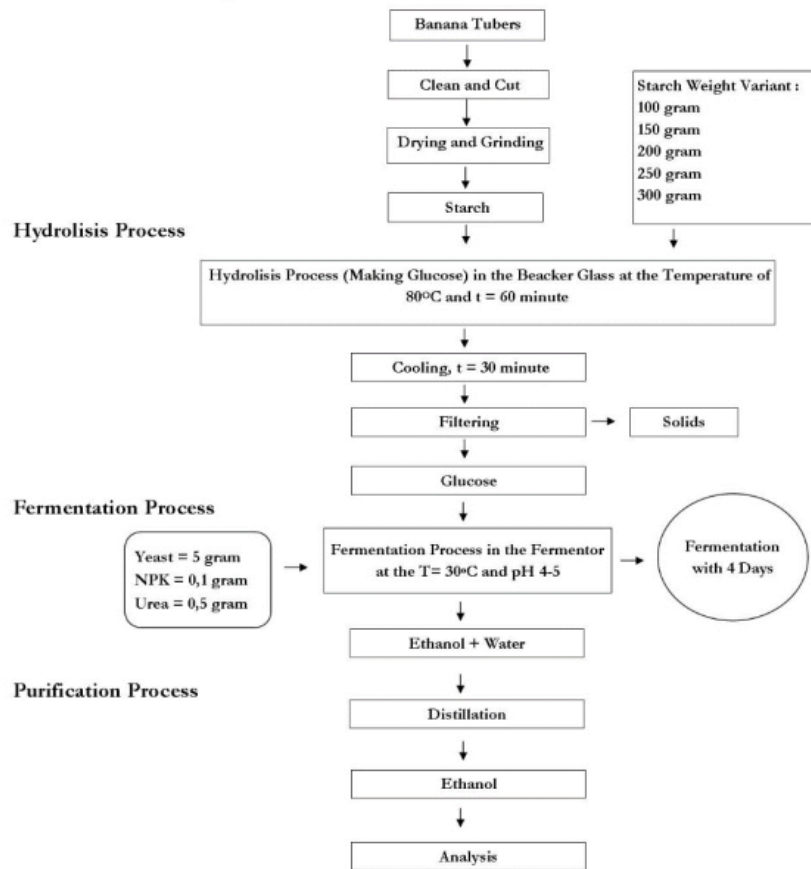


Figure 2. Research Process Diagram

18

## 3. RESULTS AND DISCUSSION

### 3.1 Effect of Starch Weight Varization on Bioethanol Volume

The important factors for bioethanol volume are temperature and time to produce large volumes with high levels. The distillation process carried out in the study lasted 4 hours. The following is a graph of the curve obtained.

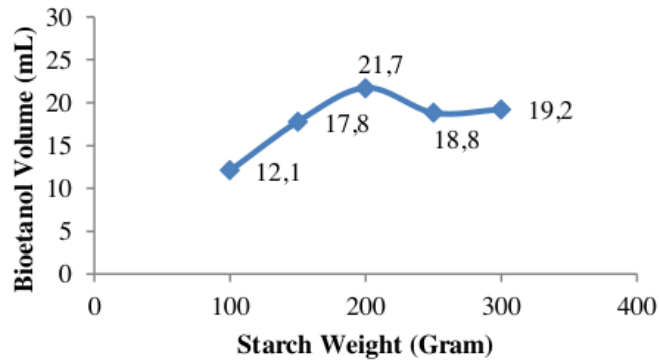


Figure 3. Effect Curve of Starch Weight Variation on Bioethanol Volume

From the curve it can be analyzed that at 200 grams of starch, the highest volume of bioethanol is obtained, namely 21.7 mL. In the experiments conducted, a large or small volume of bioethanol does not necessarily have a high bioethanol content. The high levels of bioethanol in the sample resulted in good volume quality and vice versa.

### 3.2 The Effect of Starch Weight Variations on the Degree of Acidity (pH)

Determination of the degree of acidity (pH) in the bioethanol sample produced using an instrument in the form of a pH-meter. This can be improved so that it can be compared to ethanol according to SNI standards ranging from 6.5 to 9.0. The effect of variations in starch weight on the degree of acidity (pH) of the bioethanol produced can be seen in the figure below.

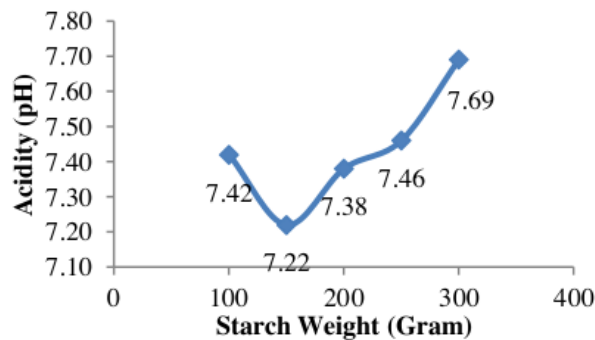



Figure 4. Influence Curve of Starch Weight Variation to Degree of Acidity (pH)

In the picture above, it can be seen that all the samples used produce a pH of 7, where the largest pH is in the use of 300 grams of starch with a pH value of 7.69

and the smallest pH is in the use of starch of 150 grams, namely pH 7.22. The pH of the bioethanol yield is influenced by the fermentation that runs for 4 days. pH in fermentation greatly affects the conversion of glucose into bioethanol.

### 3.3 Effect of Starch Weight Variation on Bioethanol Refractive Index

Determination of the refractive index on the sample using a tool in the form of a refractometer. The refractometer works by utilizing light refraction, so that the scale of the reading can be found in determining the refractive index of the sample.

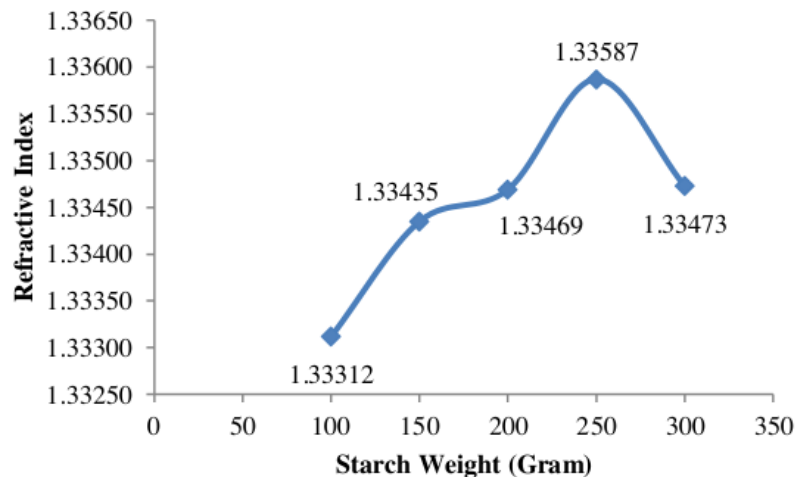


**Figure 5.** Influence Curve of Starch Weight Variation against the Bioethanol Refractive Index

In Figure 5, the highest refractive index value obtained is 1.33587 with bioethanol content in gas chromatography analysis of 8.4432%, where the use of plantain (*Musa Sapientum*) Turber starch is 250 grams. In the picture above, it can also be seen, the value of the refractive index of bioethanol has increased in 250 grams of banana Turber starch, and has decreased at 300 grams of starch used. This is directly proportional to the levels of bioethanol obtained using gas chromatography.

### 3.4 Effect of Starch Weight Variations on Bioethanol Levels

In the hydrolysis process, sulfuric acid acts as a catalyst which will help accelerate the conversion of banana Turber starch to bioethanol so that later glucose is obtained with good levels which are then fermented using baker's yeast. The sulfuric acid used in the study was 0.5 N with a hydrolysis temperature of 800C

for 60 minutes with a variable starch weight of 100 grams, 150 grams, 200 grams, 250 grams and 300 grams.

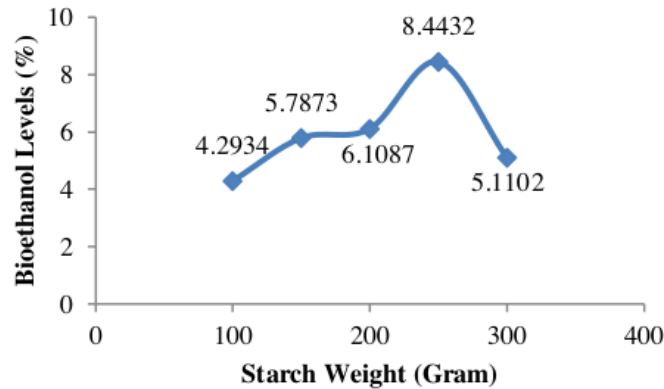

**Figure 6.** Influence Curve of Starch Weight Variation against Bioethanol Levels

On the curve, it was found that at 100 grams of starch weight, the bioethanol content formed was 4.2934% and increased in the next sample, namely the use of starch of 150 grams and 200 grams, namely 5 levels of bioethanol, respectively. 7873% and 6.1087%. The highest bioethanol content which can be seen from the curve above is the use of 250 grams of starch with a bioethanol content of 8.4432%. Then in the use of 300 grams of starch, the bioethanol content decreased, namely by 5.1102%. It can be analyzed that the sulfuric acid which converts banana Turber starch will only be optimal when using 250 grams of plantain (*Musa Sapientum*) Turber starch, or if the new use of sulfuric acid solution is used into each sample during the hydrolysis process it will be very influential in conversion of starch to glucose.

#### 4. CONCLUSION

Utilization of banana turber waste (*Musa Sapientum*) has great potential as a source of starch in the manufacture of bioethanol, so that it can increase the use value of the banana weevil itself. In this study, the optimum results were obtained to produce good bioethanol levels, namely at 250 grams of starch weight because in the conditions the addition of starch produced 18.8 mL of bioethanol with the largest bioethanol content, namely 8.4432%, pH of 7.46 and refractive index amounting to 1.33587.

#### REFERENCES

- [1] Brown, G.G. Unit Operations. John Wiley and Sons. Inc: New York, 1987.



- [2] Badan Pusat Statistik. Statistik Lingkungan Hidup Indonesia 2016. Jakarta: Badan Pusat Statistik Indonesia, 2016.
- [3] Eni, R. W. Sari. Moeksin, R. Pembuatan Bioetanol Dari Air Cucian Beras Menggunakan Metode Hidrolisis Enzimatis Dan Fermentasi, 2015.
- [4] Erliza Hambali, Siti Mudjalipah, Armansyah Haloman Tambunan, Abdul Waries Pattiwiri, Roy Hendroko. Teknologi Bioenergi. Jakarta: Agromedia Pustaka, 2007.
- [5] Ermawati Dkk. Kajian Pemanfaatan Limbah Kulit Pisang Raja (Musa Paradisiaca Var Raja) Dalam Pembuatan Es Krim. Fakultas Ilmu Pertanian. Universi Hulu Oleo, 2016.
- [6] Khaidir. Pengolahan limbah pertanian sebagai bahan bakar alternatif. Jurnal Agrium, 13(2), 63– 68, 2016.
- [7] Lubis, A. dan A. Sugiyono. Overview of Energy Planning in Indonesia. Technical Committee Meeting to Asses and Compare the Potential Rule of Nuclear Power and Other Option in Alleviating Health and Environmental Impacts Electricity Generation, 14 - 16 October, Vienna,Austria, 1996.
- [8] Ma, Y., Cai, W., & Liu, Y. An integrated engineering system for maximizing bioenergy production from food waste. Applied Energy, 206, 83–89, 2017.
- [9] Pessoa MG, Vespermann KAC, Paulino BN, Barcelos MCS, Pastore GM, Molina G. Newly Isolated Microorganisms with Potential Application in biotechnology. Biotechnology Advances. 37(2): 319-339. Poutanen, 2019.
- [10] Prescott, S., G and Dunn, C. G. Industrial Microbiology. ed 3. New York: GrawHill Book Company, 1959.
- [11] Pusat Data Dan Informasi Pertanian. ISSN 1907-1507. Kementerian Pertanian Republik Indonesia. Jakarta, 2016.
- [12] Prihardana, R. Bioetanol Ubi kayu Bahan Bakar Masa Depan. Jakarta: Agro Media Pustaka, 2007.
- [13] Adjaatmaka dan Qodratillah. Kamus Kimia. Jakarta: Balai Pustaka, 2002.
- [14] Haryono, Yon. Pengaruh Variasi Konsentrasi Asam Sulfat Dan Waktu Fermentasi Pada Pembuatan Bioetanol Dari Bonggol Pisang (Musa Paradisiaca), 2015.

# The Influence of Starch Weight Variations in Making Bioethanol from Plantain Turber Waste (Musa Sapientum)

## ORIGINALITY REPORT

19%

SIMILARITY INDEX

18%

INTERNET SOURCES

6%

PUBLICATIONS

12%

STUDENT PAPERS

## PRIMARY SOURCES

1	Submitted to University of the West Indies Student Paper	6%
2	industria.ub.ac.id Internet Source	2%
3	es.scribd.com Internet Source	2%
4	fr.scribd.com Internet Source	1%
5	e-journal.unair.ac.id Internet Source	1%
6	id.123dok.com Internet Source	1%
7	repositori.uin-alauddin.ac.id Internet Source	1%
8	Submitted to Universitas Islam Indonesia Student Paper	1%
9	eprints.polsri.ac.id Internet Source	1%

10	Submitted to State Islamic University of Alauddin Makassar Student Paper	1 %
11	Submitted to King's College Student Paper	<1 %
12	JONES, D. T.. "THE STRATEGIC IMPORTANCE OF BUTANOL FOR JAPAN DURING WWII: A CASE STUDY OF THE BUTANOL FERMENTATION PROCESS IN TAIWAN AND JAPAN", Systems Biology of Clostridium, 2014. Publication	<1 %
13	Marhaini, Legiso, Trilestari. "The synthetic activities of TiO <sub>2</sub> -moringa oleifera seed powder in the treatment of the wastewater of the coal mining industry", IOP Conference Series: Materials Science and Engineering, 2018 Publication	<1 %
14	core.ac.uk Internet Source	<1 %
15	sciencepubco.com Internet Source	<1 %
16	www.davidstea.com Internet Source	<1 %
17	bbp2tp.litbang.pertanian.go.id Internet Source	<1 %

18

Internet Source

<1 %

---

19

[www.coursehero.com](http://www.coursehero.com)

Internet Source

<1 %

---

Exclude quotes  On

Exclude matches  Off

Exclude bibliography  Off